



**WGX1048E** – Used for floor/horizontal application only.  
 Flow rating as tested per ASME A112.19.8-2007  
 is 125gpm and is noted on cover.

**WGX1048EW** – Used for wall/vertical or floor/horizontal applications.  
 Flow rating tested per ASME A112.19.8-2007  
 is 72gpm and is noted on cover.

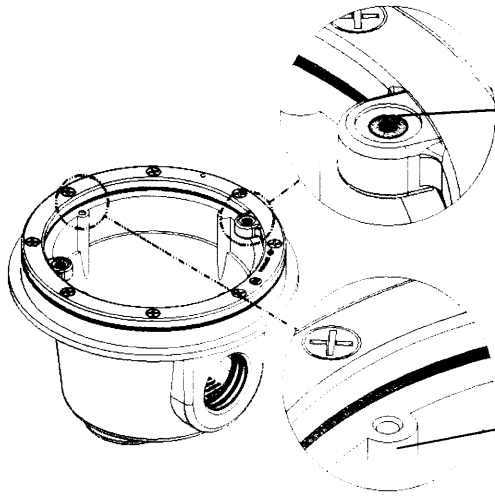


Part number is **WGX1030Z2AM** 15/16 long  
 and is used with sumps that have **metal inserts**.

**WG1048AVPAK2 / WG1049AVPAK2**




Part number is **WGX1030Z2A** 1-1/2 long  
 and is used with sumps without metal inserts.

**SP1048AVPAK2 / SP1049AVPAK2**

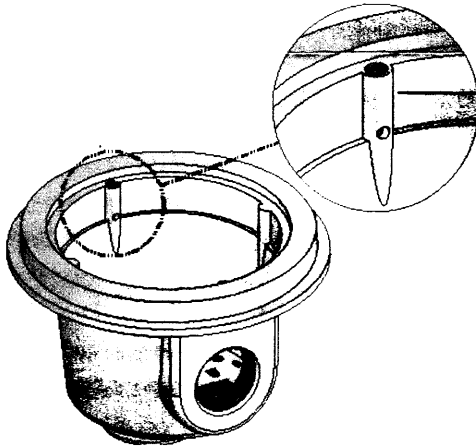

Part number is **WGX1030Z1AM** 1-1/4 long  
 and is used with sumps / frames that have **metal inserts**.

**WG1051AVPAK2 / WG1052AVPAK2 /  
 WG1053AVPAK2 / WG1054AVPAK2 /  
 WG1153AVPAK2 /  
 WG1154AVPAK2 / WG1030AVPAK2**

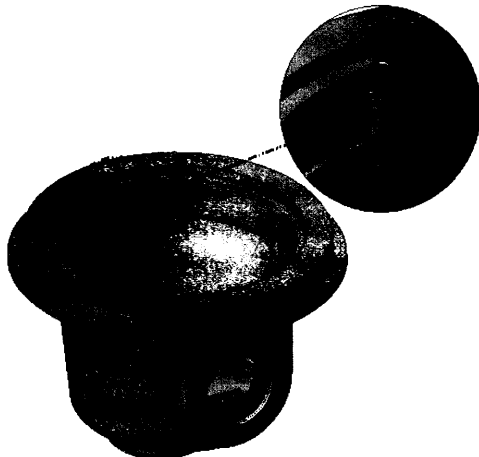

Part number is **WGX1030Z1A** 1-1/4 long  
 and is used with sumps **without** metal inserts.

**SP1051AVPAK2 / SP1052AVPAK2 /  
 SP1053AVPAK2 / SP1054AVPAK2 /  
 SP1153AVPAK2 /  
 SP1154AVPAK2 / SP1030AVPAK2**